



7

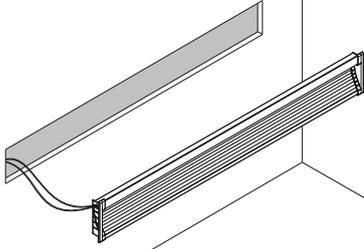


Before fixture is installed, bring low-voltage wires from Alu-Wall through opening in the wall and proceed with wiring to power supply.

9

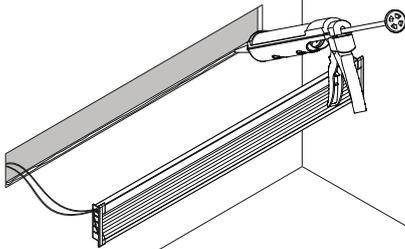

It is recommended that adhesive is applied to the top and bottom surfaces of the drywall opening to secure the extrusion in place.


8

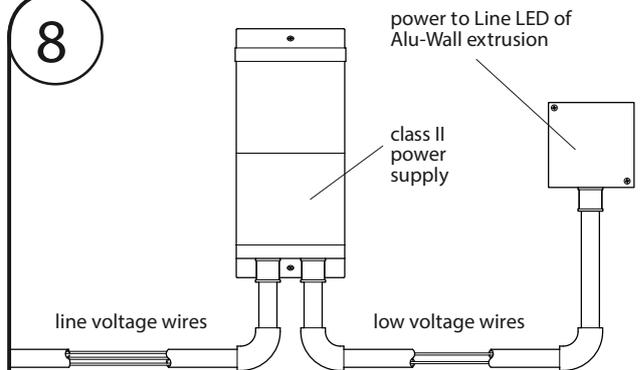

Ensure power is off to power supply!

Connect Line LED lead wires from Alu-Wall extrusion to power supply. For more information please refer to power supply and Line LED wiring instructions.

10



Follow adhesive manufacturer's recommendations for drying times then simply friction fit Alu-Wall assembly in drywall opening.